



## Brother P-touch PT-E560BTVP Industrial Handheld Label Printer

Print durable labels up to 24 mm



## New features in the series

- Bluetooth<sup>®</sup> wireless technology<sup>®</sup> to quickly connect design & print labels from your mobile device with the included Pro Label Tool App<sup>2</sup>
- USB Type-C<sup>®</sup> to charge your battery or design and print labels from your PC or Mac with included P-touch Editor design software<sup>2</sup>
- Automatic dual cutter to print a strip of labels with halfcuts, making it easy to peel and apply
- Load a database into the printer, search and select a range to print as specific label application
- Charge your battery in half the time<sup>4</sup>
- Create and print QR codes and commonly used barcodes
- Adjustable hand strap with an included accessory ring to help reduce accidental drops




## Keep using all of your P-touch labels

All P-touch laminated tapes, flags and heat shrink tubes are backwards compatible with the new models (in compatible sizes).



	Max. Media Width	USB-C	Bluetooth	Cutter	Database	Barcodes	Battery Charge Time	Drop Protection
PT-E560BTVP	24 mm	~	~	Automatic Dual Cutter	~	QR & 1D	3 hours <sup>4</sup>	Hand strap

	PT-E560BTVP					
Type of Printer	Industrial Handheld Label Printer					
Print Width	0.71 in (18 mm)					
Lines per Label	Up to 7 lines					
Media	HGe & TZe Tapes, HSe Heat Shrink Tube, STe Stencil, SLe Self-Laminating					
Media Sizes (width)	3.5 mm, 6 mm, 9 mm, 12 mm, 18 mm, 24 mm					
Included Computer Software <sup>2</sup>	Windows <sup>®</sup> Printer Driver, P-touch Editor v6.x for Windows <sup>®</sup> , P-touch Editor v5.x for Windows <sup>®</sup> (with Cable Labeling Wizar Transfer Manager v2.x for Windows <sup>®</sup> , Printer Setting Tool for Windows <sup>®</sup> , Transfer Express for Windows <sup>®</sup> , Update Software Windows <sup>®</sup> , Driver Deployment Wizard for Windows <sup>®</sup> , Firmware Update Tool for Windows <sup>®</sup> & Mac <sup>®</sup>					
Memory	Download: Up to 99 templates, databases & images (6 MB) Standalone: Up to 99 files (1,800 characters / file)					
Operating Systems	Computer: Windows <sup>®</sup> 11/10 (32/64 bit) / Mac <sup>®</sup> macOS 12.x or Later / Mobile: Android <sup>™</sup> 10 or Later, / iOS <sup>®</sup> 16 or Later					
Maximum Print Resolution	180 x 180 dpi (Standalone), 180 x 360 dpi (Computer)					
Mobile Apps <sup>2</sup>	Pro Label Tool for Android <sup>™</sup> & iOS <sup>®</sup> / iLink&Label for Android <sup>™</sup> & iOS <sup>®</sup> / Mobile Transfer Express for Android <sup>™</sup> & iOS <sup>®</sup> Print SDK Demo for Android <sup>™</sup>					
SDK Support	Windows <sup>®</sup> , Android <sup>™</sup> , iOS <sup>®</sup>					
Interfaces (Profile)	USB Type-C <sup>®</sup> , / Bluetooth <sup>®</sup> Ver. 5.0 (SPP) / MFi (iAP)					
Display	240 x 120 dot back-lit graphic LCD (17 characters x 2 lines) with real print preview feature					
Keyboard	QWERTY layout with rubber keys					
Cutter	Automatic with multi-label strip half-cutter					
Print Speed <sup>3</sup>	Up to 1.2 ips (30 mm / sec) <sup>4</sup>					
Function Keys	10 keys, 13 functions (General, Faceplate, Cable Wrap / Heat Shrink Tube, Cable Flag, Patch Panel / Terminal Strip, Punch Block, Barcode, Serialize, Advanced Serialization, Database, Self-Laminate)					
Copy / Serialization	Up to 99 / 1-2 fields individually / simultaneously (alpha-numeric)					
Resident Fonts	14 (Helsinki, Brussels, US, Los Angeles, San Diego, Florida, Calgary, Belgium, Atlanta, Adams, Brunei, Sofia, Germany, Gothic)					
Font Sizes / Styles	9 sizes / 10 styles (standalone)					
Rotated Characters	Up to 25 alpha-numeric characters (on 24 mm tape)					
Invert, Mirror & Vertical Printing	Yes					
Resident Barcodes	1D (9): Code39, Code128, I-2/5 (ITF), UPC-A/E, EAN-8/13, GS1-128 (UCC/EAN-128), CODABAR (NW-7) 2D (2): QR Code, Data Matrix					
Symbol Library	477 (59 voice / data and audio visual, 109 electrical, 104 safety, 205 misc.)					
Drop Prevention	Hand Strap (Left / Right)					
Product Dimensions / Weight	5.19 in x 9.6 in x 3.15 in (132 mm x 244 mm x 80 mm) / 2.31 lbs. (1.1 kg) without tape cassette & battery					
Energy Efficiency	Energy Star Certified					
Power Supply	BA-E001 Li-ion Battery Pack (Standard), PA-AD-004 USB-C PD AC Adapter (Optional)					
Battery Charge Time	As fast as 3 hours <sup>4</sup>					
Operating Temperature / Humidity	50° F to 95° F (10° C to 35° C) / 20% to 80% non-condensing					
Carton Contents	Protective Case, Hand Strap, Li-ion Battery, USB-C Cable, Patch Panel Ruler, TZeFX251 Tape					
Warranty	1-year limited exchange warranty					

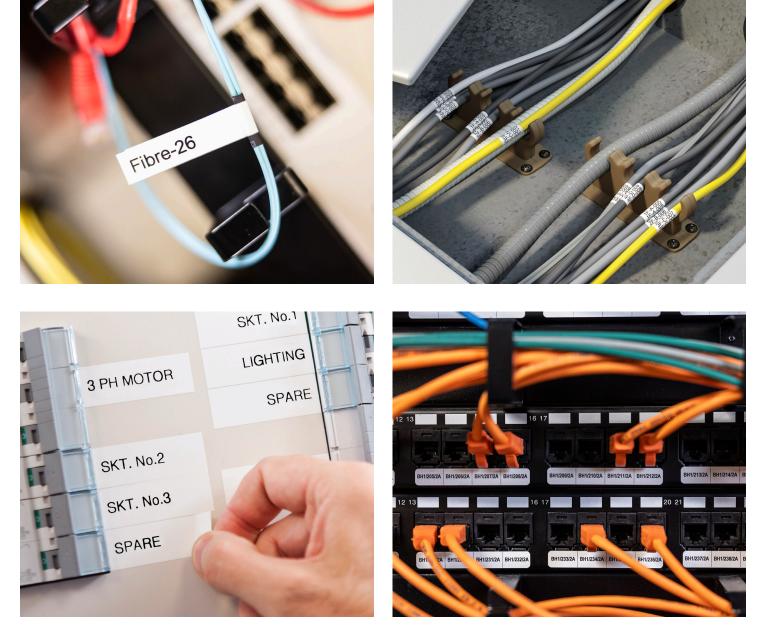

1 A CSV database file is required for the database functionality in the printer and for the Pro Label Tool app. P-bouch Editor for Windows is compatible with the following database file formats: btt, CSV, xis, xisx, mdb and accdb. 2 Additional download and wireless connection may be required. Compatibility may vary by device, operating system and label printer used. 3 Based on performance tests using Borther certified media, actual results may vary by application. 4 When using optional wall charger PA-AD-004. @2025 BBOTHER INTERNATIONAL CORPORATION All tradematics and registered trademarks on Applications reported trademarks of Applications subject to change without notice. MS-6365\_Spec Sheet for PT-E560BTVP.