


ThermoSmart



R3

Hi-D Subfloor System

Add Real Insulation Value to your Home

- + Easy to install
- + Foolproof stability
- + Limited lifetime warranty



Dimensions:

15.5 in. x 47.5 in. x 1 in.




Surface:

5.13 sq. ft. per panel



Compression:


2200 lbs per sq. ft.

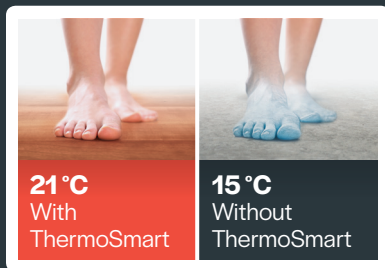

The Multiple Advantages of the System


Easy to install

Installation is 25% faster than other types of subfloor and significantly reduces the number of joints.



Quadrilateral Pattern Surface

Permits the air to flow freely, allowing the concrete to breathe.




Expanded Polystyrene (EPS)

In addition to providing an insulative value (R3), EPS is produced with vapour, therefore emit no off-gases.




OSB Surface

Engineered wood, oriented strand board.



iLock Joint

A unique sealing system of double tongue and groove prevents moisture from affecting the wood.



Flex-Groove

The two grooves provides flexibility to the panel, in order to adapt to the unevenness of the concrete slab.

InsulFloor

INSULFLOOR.COM | 1 877 664 6662