

4 in. Octagonal Boxes

IBERVILLE®




56111-CRT




54151K-CRT



54151L-CRT



54151LA-CRT



54151LB-CRT



54151LD-CRT



54151LSSAX-RT



CI54171-KSSX



Cat. No.	Features					Conduit Knockouts		Packaging		
	Cubic Capacity	Usage	Bracket (See page A3)	Ground Screw		Max. Load	Sides		Bottom	
1/2 IN. DEEP										
56111-CRT	5.0	KO		1	yes	50 lb.		4 x 1/2 in.	1 unit	
56111-VP										4 units
1-1/2 IN. DEEP										
54151K-CRT	15.0	KO		1	yes	50 lb.	2 x K + 2 x 1/2 in.	2 x K + 2 x 1/2 in.	1 unit	
54151K-VP										
54151L-CRT		L		2			12 lb.	2 x 1/2 in.	1 x 1/2 in. KO and 8 pryouts	1 unit
54151L-EP30										
54151-L-VP		L / LA				35 lb.	2 x K + 2 x 1/2 in.	2 x K + 2 x 1/2 in. and 8 pryouts		4 units
54151LA-CRT										1 unit
54151LB-CRT		L	B			50 lb.	2 x K	1 x 1/2 in. KO and 8 pryouts	1 unit	
54151LD-CRT			D							
CI54151-LF										
54151LSSAX-RT	L / LA	SSX		no						
CI54151-KSSX	KO	SSX		1	yes					


Usage: K: Conduit KOs only, L = NMD90 (Loomex, nonmetallic sheathed cable), LA = AC90 (BX, armoured cable) Conduit knockouts: K = concentric 1/2 in. and 3/4 in.
 Note: CEC 2012 rule 30-302: 4) Where the weight of a luminaire does not exceed 23 kg (50 lb.), the luminaire shall be permitted to be supported by a ceiling outlet box attached directly to the building structure or by a ceiling outlet box attached to a bar hanger.



54171K-RT




54171L-CRT



54171LB-RT



54171LF-RT

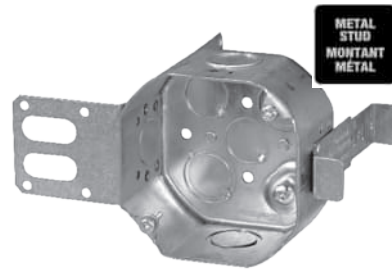

54171KSSX-CRT

METAL
STUD
MOUNTANT
METAL



Cat. No.	Features					Conduit Knockouts		
	Cubic Capacity	Usage	Bracket (See page A3)	Ground Qty.	Screw Raised	Max. Load	Sides	Bottom
54171K-RT	21.0	KO	SSX	1	yes	50 lb.	2 x K + 2 x 1/2 in.	2 x K + 2 x 1/2 in.
54171KSSX-CRT			SSX-1				2 x K	
CI54171-KSSX-1		L / LA	SSX	2	no		2 x 1/2 in.	
54171L-RT			B			1 x 1/2 in.		
BC54171-LSSAX		L			yes	35 lb.	2 x K + 2 x 1/2 in.	2 x K + 2 x 1/2 in. and 8 pryouts
54171LB-RT								
54171LF-CRT								

54171LF-CRT is designed for ceiling fan and supplied with 2 #10-32 machine screws and star washers.

Usage: K = Conduit KOs only, L = NMD90 (Loomex, nonmetallic sheathed cable), LA = AC90 (BX, armoured cable) Conduit knockouts: K = concentric 1/2 in. and 3/4 in.

Note: CEC 2012 rule 30-302: 4) Where the weight of a luminaire does not exceed 23 kg (50 lb.), the luminaire shall be permitted to be supported by a ceiling outlet box attached directly to the building structure or by a ceiling outlet box attached to a bar hanger.