


Cat. No.	Features						Conduit Knockouts		Packaging
	Cubic Capacity	Usage	Ears	Bracket (See page A3)	Ground Screw (Qty.)	Additional Features	Ends	Bottom	
1-1/2 IN. DEEP									
1100L-CRT 1100L-VP 1100LLE-CRT	8.0	L / LA	F		1		4 pryouts		4 units
2 IN. DEEP									
CI425 1102-CRT CI1102-SB CI3102-SSX CI425-L 1102L-CRT 1102LH-CRT CI3102-LSSAX	10.0 12.0 10.0 12.0	KO L / LA	F R F	Screwlock SB SSX Screwlock SSX	1	Max. 5/8 drywall Side Bracket Max. 5/8 drywall	2 x 1/2 4 pryouts		
2-1/4 IN. DEEP									
CI775-L 775LD-CRT	10.0	L	F	D	1	Max. 3/4 drywall	4 pryouts	1 x 1/2 in.	

Mounting Ears: F = Flush R = Recessed
Usage: KO: Conduit KOs only, L = NMD90 (Loomex, nonmetallic sheathed cable), LA = AC90 (BX, armored cable)

Device Boxes Gangable 3 x 2 in.

IBERVILLE®

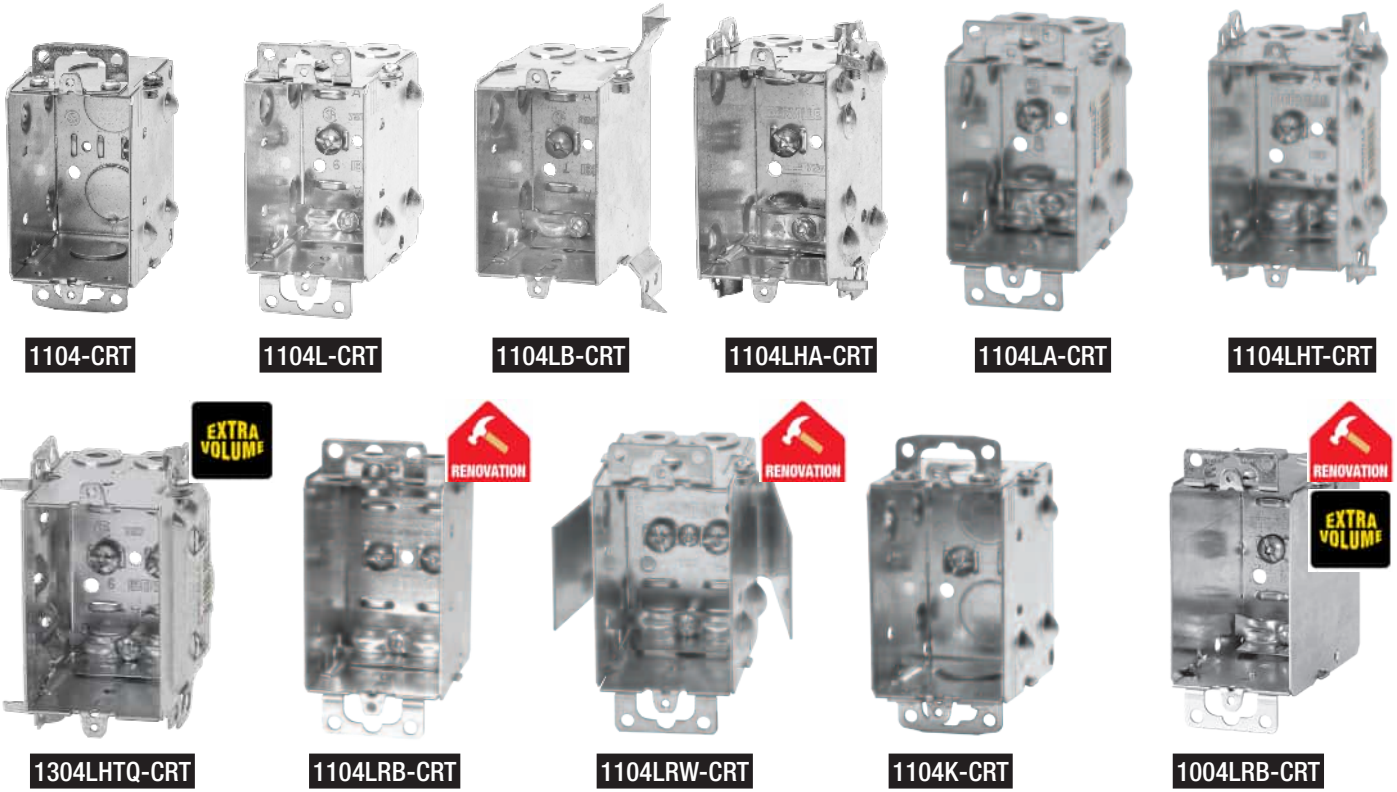

Cat. No.	Features						Conduit Knockouts		Packaging						
	Cubic Capacity	Usage	Ears	Bracket (See page A3)	Ground Screw (Qty.)	Additional Features	Ends	Bottom							
2-1/2 IN. DEEP															
1104-CRT	12.5	KO	R	B	1	Side Bracket	2 x 1/2 in.	2 x 1/2 in.							
CI1104-B													2 x K		
1104K-CRT														R	SB
BC1104-LE															
CI1104-SB															
1104L-CRT			L / LA			F				2	Positioning Tabs	4 pryouts	4 units		
1104L-VP															
1104LA-CRT					B			Side Bracket							
1104LB-CRT															
1104LHA-CRT															
1104LHT-CRT															
1104LHT-EP30															
1104-LHT-VP															
CI1104-LMS		L	F		MS		Mounting Strap			30 units					
CI1104-LMSA															
1104LRB-CRT															
1104LRW-CRT				RW		Flat sides Max. 1 drywall		6 units							
1304LHTQ-CRT	14.5	L / LA			2	LHTQ (see page A4)									
3 IN. DEEP															
1004LRB-CRT	15	L	F		2	Flat sides	4 pryouts								

Mounting Ears: F = Flush R = Recessed
 Usage: KO: Conduit KOs only, L = NMD90 (Loomex, nonmetallic sheathed cable), LA = AC90 (BX, armored cable)
 Conduit knockouts: K = concentric 1/2 in. and 3/4 in.