

Device Boxes Gangable 3 x 2 x 3 in. Deep

IBERVILLE®




1004-CRT



1004L-CRT




1004LH-CRT

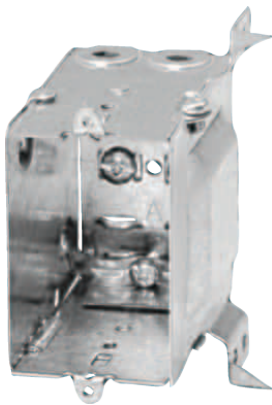

CI1004-LB



3004LH-RT

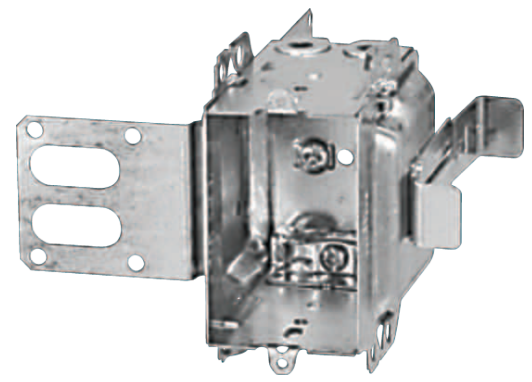

CI3004-LSSAX-1



Cat. No.	Features						Conduit Knockouts		Packaging	
	Cubic Capacity	Usage	Ears	Bracket (See page A3)	Ground Screw (Qty.)	Additional Features	Ends	Bottom		
1004-CRT	15.0	KO	R		1		2 x 1/2 in.	2 x 1/2 in.		
1004L-CRT			F							
1004LH-CRT										
1004LH-VP										Positioning Tabs
CI1004-LHA										
CI1004-LB	16.0	L / LA		B	2	Side Bracket	4 pryouts			
3004LH-RT						Positioning Tabs				
CI3004-LSSX	18.0			SSX						
CI3004-LSSX-1										
CI3004-LSSAX-1				SSX-1						

Mounting Ears: F = Flush R = Recessed
Usage: KO: Conduit KOs only, L = NMD90 (Loomex, nonmetallic sheathed cable), LA = AC90 (BX, armored cable)