


# Device Boxes Non-gangable 3 x 2-1/2 in. Deep


# IBERVILLE®




2104LLE-CRT



2104LN-CRT

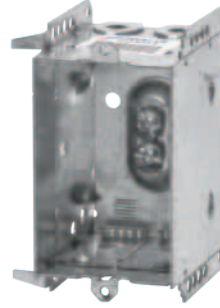


2104LX-CRT

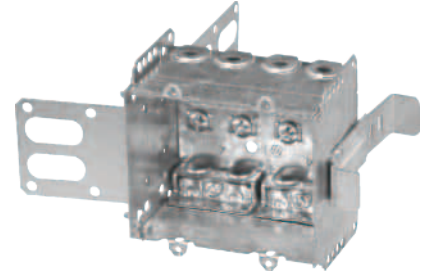

CI2104-LSSA-2X



2104LLE2-CRT

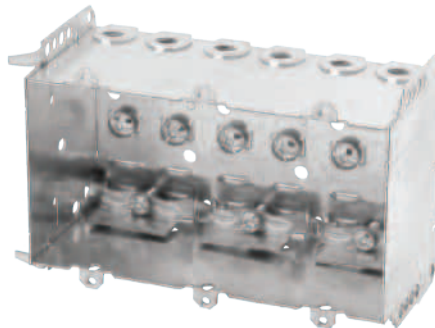

2104LLE3-CRT



2104LLE4-CRT



Cat. No.	Features							Packaging						
	Width (in.)	Cubic Capacity	Usage	Bracket (See page A3)	Ground Screw (Qty.)	Additional Features	Pryouts Ends							
2104LLE-CRT	2	12.5	L / LA		2	Positioning Tabs	4 pryouts	30 units 6 units						
2104LLE-EP30														
2104LLE-VP														
CI2104-LLEA														
2104LN-CRT														
2104LX-CRT														
CI2104-LSS1X-1								L	SSX-1					
CI2104-LSSAX														
CI2104-LSSX														SSX
CI-2104-LSS-2X														
CI2104-LSS2X-1	3-3/4	25.0	L / LA	SSX-1	4		8 pryouts							
CI2104-LSSA-2X								SSX						
2104LLE2-CRT														
2104LLE3-CRT	5-1/2	37.5			6	Positioning Tabs	12 pryouts							
CI-2104-LSS-3X								SSX						
CI2104-LSS3X-1														
2104LLE4-CRT	7-3/8	50.0			8	Positioning Tabs	16 pryouts							

Usage: L = NMD90 (Loomex, nonmetallic sheathed cable), LA = AC90 (BX, armoured cable)



2304LHTQ-CRT



2304LHTQ2-CRT



BC2304-LHTQ-3



BC2304-LHTQ-4



Cat. No.	Features					
	Width (in.)	Cubic Capacity	Usage	Ground Screw (Qty.)	Additional Features	Pryouts Ends
2304LHTQ-CRT	2	14.5	L / LA	2	"LHTQ" (see below)	4 pryouts
2304LHTQ2-CRT	3-3/4	27.0		4		8 pryouts
BC2304-LHTQ-3	5-1/2	39.5		6		12 pryouts
BC2304-LHTQ-4	7-3/8	52.0		8		16 pryouts

Usage: L = NMD90 (Loomex, nonmetallic sheathed cable), LA = AC90 (BX, armoured cable)

- CSA approved one (1) screw mounting (one + 2304LHTQ2-CRT)
- Retractable Positioning Tabs for double 1/2 in. drywall installations
- Three embossed slots for screw mounting
- Sides are flat for maximum stability
- Holding prongs