




1504LLE-CRT



CI1504-LSSAX

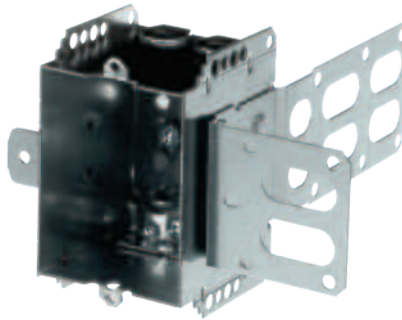

R2000-CRT



2004LH-CRT



CI2004-LHA



MBD1K-CRT



Cat. No.	Features					Additional Features	Conduit Knockouts
	Cubic Capacity	Usage	Bracket (See page A3)	Dimensions Height x Width x Depth	Ground Screw (Qty.)		Ends
1504LLE-CRT	15	L / LA		3 in. x 2-1/4 in. x 2-1/2 in.	2	Positioning Tabs	4 pryouts
CI1504-LSSAX			SSX				
2004LH-CRT	18.5			3-3/4 in. x 2-3/16 in. x 2-3/4 in.		Positioning Tabs	
CI2004-LHA							
R2000-CRT	18.0	KO		3-3/4 in. x 4 in. x 2 in.		Low Profile	1-1/2 in. connector assembled
MBD1K-CRT	21.0			3-3/4 in. x 2 in. x 3-1/2 in.			1/2, 3/4, 1 in.

Usage: KO: Conduit KOs only, L = NMD90 (Loomex, nonmetallic sheathed cable), LA = AC90 (BX, armoured cable)