





STRAIGHT

- Liquidtight and strain relieving
- Nylon construction
- Indoor or outdoor use

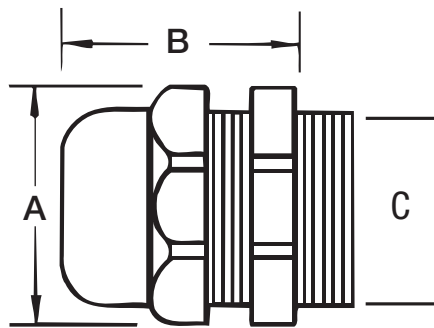

90 DEGREES

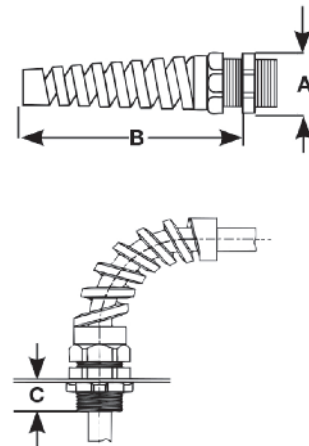

Cat. No.	Trade Size (in.)	Knockout Size (in.)	Dia. Over Cable Jacket (in.)		Throat Diameter (in.)	Dimensions (in.)			Packaging
			Min.	Max		A	B	C	
“SKINTIGHT” STRAIGHT CORD FITTINGS (NYLON)									
CISLR-9-03*	3/8	3/8	0.069	0.187	0.375	3/4	31/32	17/32	
CISLR-9-03*			0.115	0.312					
CISLR-13-04	1/2	1/2	0.170	0.450	0.500	15/16	1-3/32	5/8	Clamshell of 1 unit Bag of 1 unit
SL13-04M1			0.230	0.546		1-1/16	1-7/32		
SL-13-04-V2-RP			0.250	0.485	0.600	1-9/32	1-11/32		
CISLR-21-04			0.450	0.709					
CISLR-21-06	3/4	3/4	0.250	0.485	0.667	1-5/16			
CISL-21-06			0.450	0.709					
90° “SKINTIGHT” CORD FITTINGS (NYLON)									
CISLFR-9-03*	3/8	3/8	0.065	0.230	0.375	3/4	2-7/16	7/32	
CISLF-9-03*			0.105	0.315					
CISLFR-13-04	1/2	1/2	0.095	0.290	0.500	15/16	3-15/32	5/8	
CISLF-13-04			0.170	0.450					
CISLFR-21-06	3/4	3/4	0.250	0.490	0.667	1-5/16	4-17/32		
CISLF-21-06			0.435	0.705					

* UL Recognized