

1W19

Congratulations and thank you for purchasing a Rubbermaid storage building.

BEFORE YOU BEGIN - BUILDING CODES

Be sure to check your local building codes, ordinances and restrictions, and applicable neighborhood governances.

BEFORE YOU BEGIN - SURFACE PREPARATION

To ensure proper assembly and performance your shed needs to be built on a solid, level surface. A concrete or patio surface, or a treated-wood platform is recommended.

BEFORE YOU BEGIN - LOCATION

When choosing a location in your yard make sure you choose an area with easy access and one that provides proper drainage for water to run away from the shed location.

BEFORE YOU BEGIN - PREASSEMBLY

Thoroughly review all assembly steps (it is important that the steps are followed in the correct order). Review the parts list and make sure that no parts are missing.


IMPORTANT - DO NOT RETURN TO THE STORE

For assistance with your Rubbermaid Storage Building or for additional product information call our toll-free Consumer Service number: 1-888-895-2110 M-F: 8:30 a.m. to 5:00 p.m. EST


or visit us online at: www.rubbermaid.com.

Installation Steps:

- 1. Site Preparation
- 2. Floor
- 3. Walls
- 4. Roof & Doors
- 5. Finishing

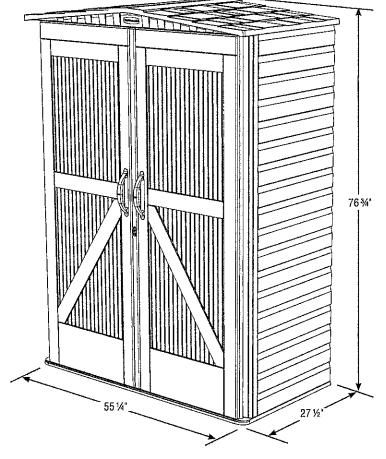

Note: Be sure to keep this instruction manual and your original store receipt to ensure our Consumer Service Department can accurately and quickly assist you if necessary.

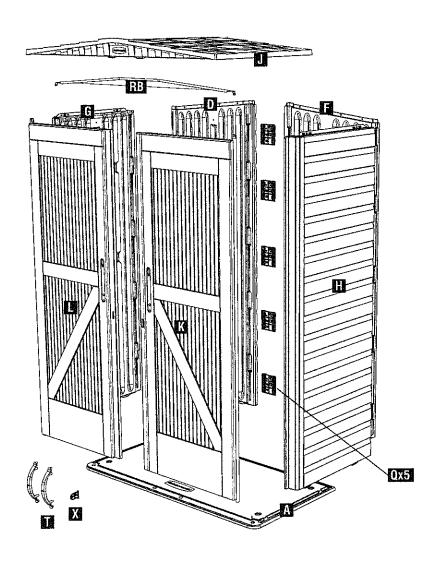

Description Front Floor	Part Number A	Assembly Lette	r Quantity 1		red Tools	1
Left Back Right Back Front Left Side Front Right Side Wall Connector	5L04 5L05 5L02 5L03 5H75	n F G H	1 1 1 1 5	Safety Glasses Gloves	Phillips Bit Drill 1/8' Drill Bit Liquid Soap	
Left Door Right Door Door Handle Lock Hasp	5L06 / 5L41 5L07 / 5L42 5L74 5F58	L T	1 1 2 1	Rubber Mallet Whillips Screwdriver	(2) Step Stools/ Stepladders	
Front Roof Roof Brace	5L08 5L36	J AB	1	Two Person Assembly		

- PREASSEMBLY:
 Review ALL assembly steps before beginning construction.
 Review the parts list and make sure that no parts are missing.

NOTE:

• To simplify assembly and to ensure proper engagement of all components, apply a mild detergent to dovetail and snap fits before assembling.

CAUTIONS


CAUTION: Always use eye protection/safety glasses during assembly.

CAUTION: When installing screws, do not overtighten. **CAUTION:** Drill only through initial panel wall, unless otherwise indicated.

CARE & USE


- Shed can be cleaned with water and mild detergent as necessary. DO NOT USE ABRASIVE DETERGENTS, MATERIALS OR CLEANING TOOLS.
- To maximize your shed's performance, remove excessive snow and/or leaf accumulation from the roof.
- In the event of severe weather, please disassemble and store in a secure location.

1.0 Site Preparation

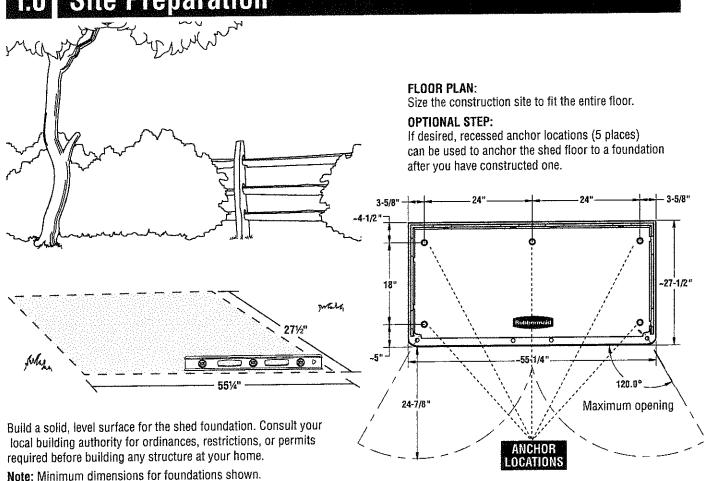


2.0 Floor Installation

a. Using a rubber mallet and screwdriver, knock out the tabs for the door hinge, 2 places on **Front Floor (A)**.

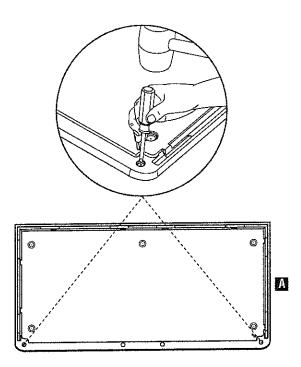


D. Drill pilot hole through top surface of floor, 2 places on **Front Floor (A)**.


CAUTION: Drill through top surface of floor only!

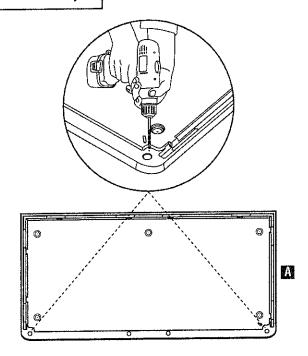

Wall Panel G Installation

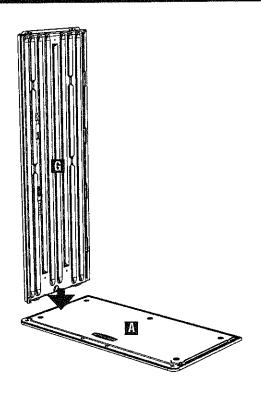


a. Using a screwdriver, punch out the screw holes on the top of **Front Left Side (G)** 2 places.

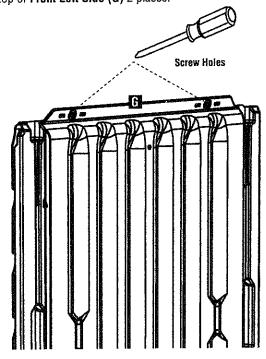


Drill a pilot hole (using 1/8" drill bit) in front lower corner at location indicated by screw target.


Note: This pilot hole is to be drilled through both walls.

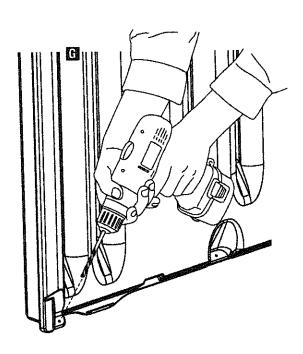


Snap Front Left Side (G) into Front Floor (A). Hold Front Left Side (G) upright to prevent it from falling (until Left Back (D) is installed).

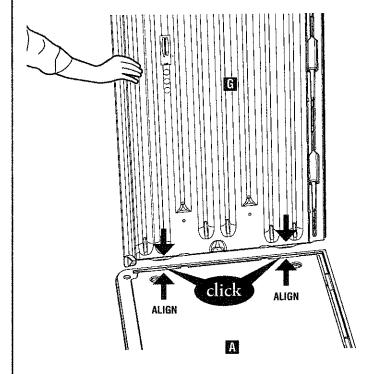

3.1 Wall Panel D Installation

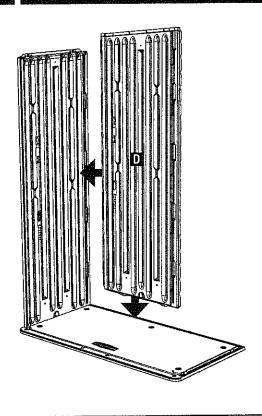


Using a screwdriver, punch out the screw holes on the top of Left Back (D) 4 places.

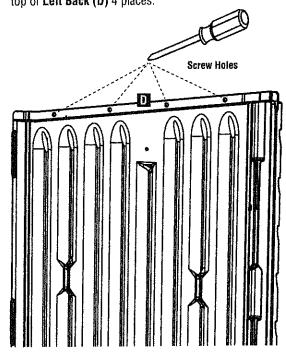



Connect Left Back (D) into dovetails of Front Left Side (G).

HELPFUL HINT: Lubricate dovetails with liquid soap.

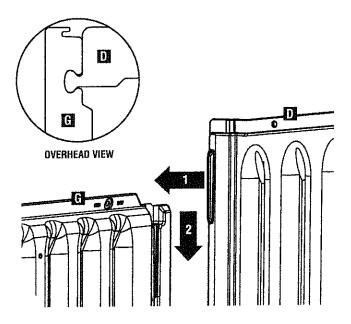


C. Engage snaps on bottom of **Left Back (D)** into **Front Floor (A)**.

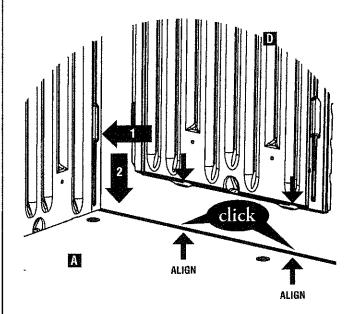

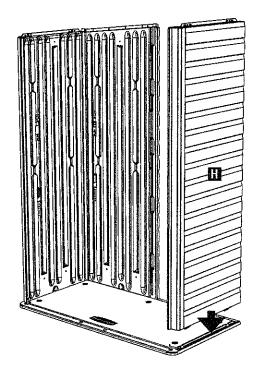


Using a screwdriver, punch out the screw holes on the top of **Front Right Side (H)** 2 places.

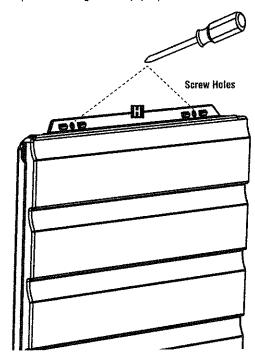


Drill a pilot hole (using 1/8" drill bit) in front lower corner at location indicated by screw target.


Note: This pilot hole is to be drilled through both walls.




Snap Front Right Side (H) into Front Floor (A). Hold Front Right Side (H) upright to prevent it from falling (until Right Back (F) is installed).

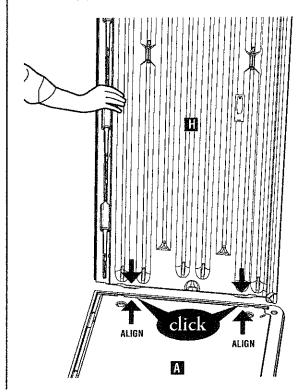

3.3 Wall Panel F Installation

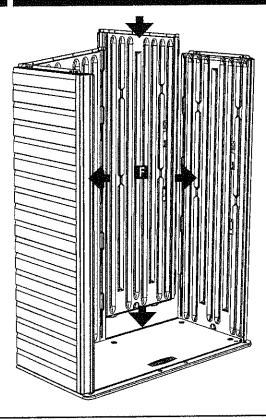



a. Using a screwdriver, punch out the screw holes on the top of **Right Back (F)** 4 places.




Connect Right Back (F) onto dovetails of Front Right Side (H).

Align the lap joint between Left Back (D) and Right Back (F).






G. Engage snaps on bottom of **Right Back (F)** into **Front Floor (A)**.

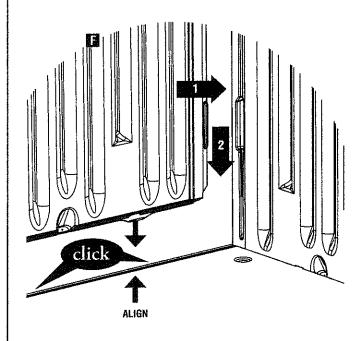


Install Wall Connector (Q) 5 places, connecting Left Back and Right Back Panels (D and F).

Position connectors in slots and slide down to snap in place.

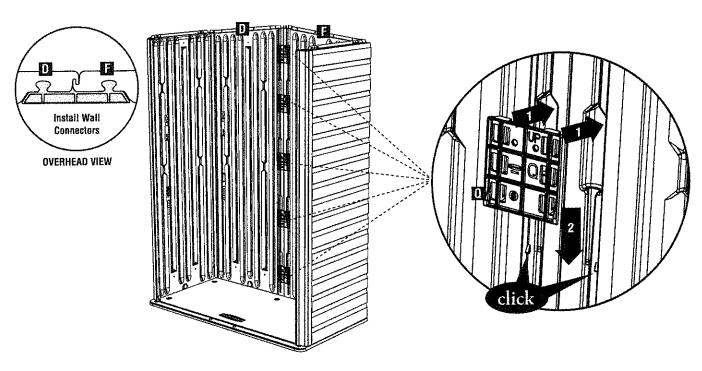


4.0 Roof Panel J & Door Installation

1. Install Front Roof (J) onto side sections. Align tongues on top of side walls into grooves in roof.

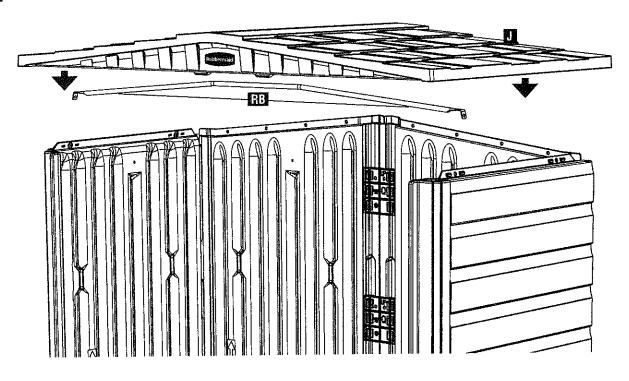


Slightly raise front edge of roof enough to allow positioning of **Roof Brace (RB)** onto the side walls as shown. Lower the roof onto the walls and align **Roof Brace (RB)** into pocket in **Front Roof (J)**.

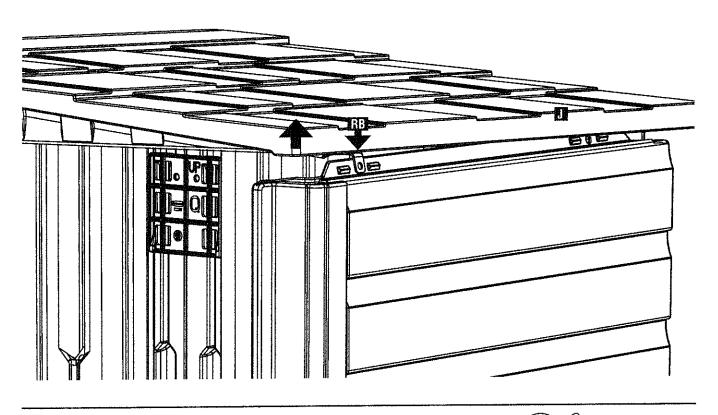


Ensure Front Roof (J) is positioned against the back wall tongues.
From outside the shed, install one Screw (AA) at each corner.
Hold the edge of the roof down firmly at the corners while installing each screw.
Install remaining screws into remaining locations of back walls.

2.




(8) AA (8)

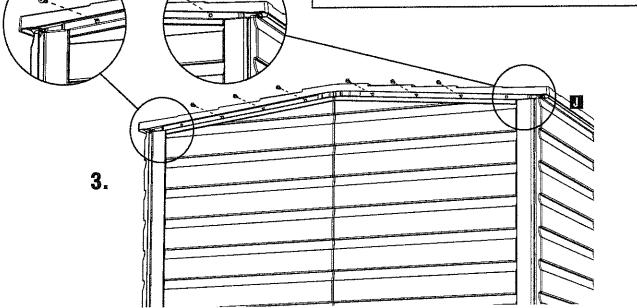

Install Left Door (L) and Right Door (K) into hinge openings of Front Floor (A) and hinge sockets in Front Roof (J).


Note: Only raise front edge of roof enough to install the door hinge pins.

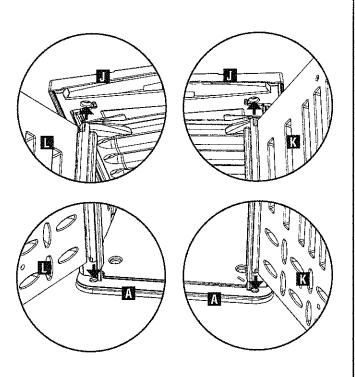


Prom inside the shed, install four **Screws (AA)** into the roof, two on each side wall.

Note: The screws also have to go through the Roof Brace (RB) at each end to properly secure the roof!

A second person on the outside of the shed should hold down the edge of the roof firmly at each screw location.






5.0 Finishing Installation

2. Install Screws (AA) into 6 locations shown at bottom of wall panels to secure walls to floor.





HELPFUL HINT: Pilot holes may be drilled for the screws. **CAUTION:** Do not overtighten screws.

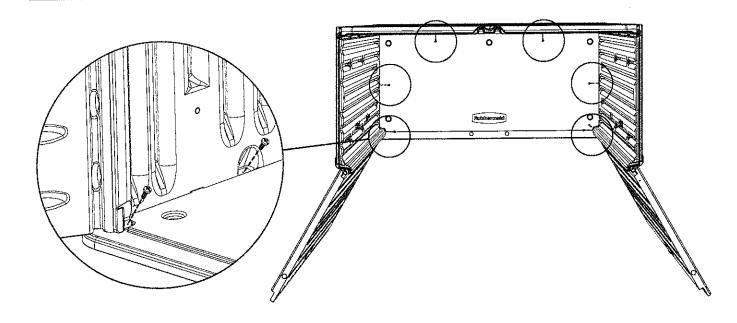

5.1 Door Finishing Installation


a Install Lock Hasp (X) into opening on Left Door (L).

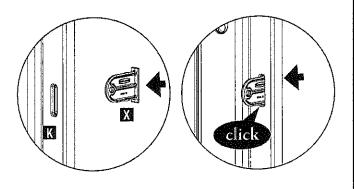



MAINTENANCE & SAFETY

- Periodically check shed to assure it remains stable and the site remains level.
- In areas of high winds it is recommended to anchor shed to platform or ground by holes in floor at designated location and secure with the proper fasteners (not included).
- Wash shed with garden hose or a mild detergent solution. Using an abrasive cleaner could damage your shed.
- Hot items such as recently used grills or fire pits should not be stored in the building.
- · Heavy items should not be leaned against the walls, as this may cause distortion.
- · Keep doors closed when not in use to prevent wind damage.
- Do not climb onto roof.
- . Shed is not designed for habitation.





A Newell Rubbermaid, Brand

Printed in U.S.A. 2013 Rubbermaid Incorporated, Huntersville, NC U.S.A. 28078-1801

Customer Service

Toll Free: 1-888-895-2110 M-F 8:30 a.m. to 5:00 p.m. EST

or visit us at www.rubbermaid.com