
DCP-L2640DW



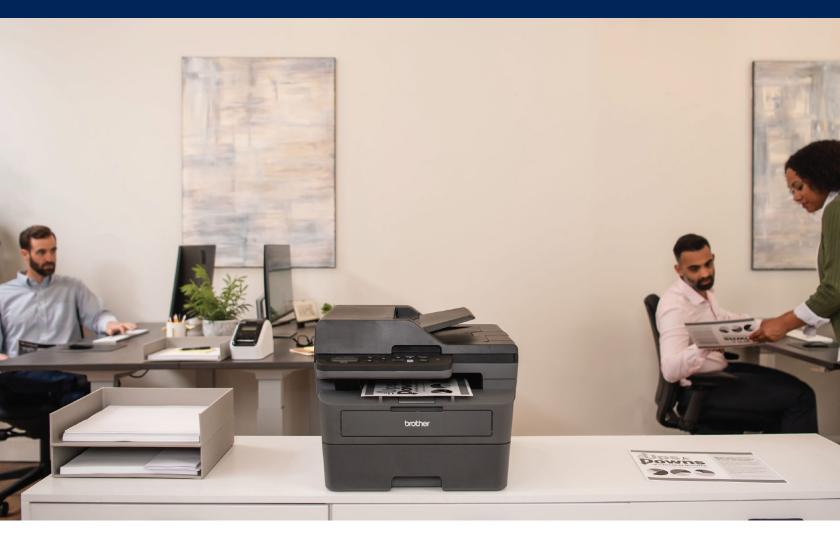

Affordable, dynamic, and reliable black & white laser performance for small offices or small businesses

Monochrome Laser Multi-Function Printer

The Brother DCP-L2640DW combines high-quality printing, fast copying, and dynamic scanning into one compact footprint that is ideal for small offices or businesses.

- Printing up to 36 ppm¹
- 3-in-1 multi-function printer with print, copy, and scan capabilities
- 50-page Automatic Document Feeder⁸ saves time with multi-page copy and scan
- Built-in dual band wireless module (2.4GHz/5GHz), Ethernet, and mobile device printing⁶
- Refresh EZ Print Subscription Ready

DCP-L2640Dw

Monochrome Laser Multi-Function Printer



Specifications:

Print		
Print Technology	Electrophotographic Laser	
Print Speed (max.) ¹	Up to 36 ppm	
Time to First Page ²	Less than 8.5 seconds	
Print Resolution (max.)	Up to 1,200 x 1,200 dpi	
Print Emulations	PCL6, BR-Script ³ , PDF Version 1.7	
Scan		
Scan Speeds (max.) ⁴	Up to 23.6 ppm/7.9 ppm (black/colour)	
Scan Resolution (max.)	ADF (optical): Up to 600 x 600 dpi Glass (optical): Up to 1,200 x 1,200 dpi Interpolated: Up to 19,200 x 19,200 dpi ⁵	
Scan To Capability	PC (Image, Email, OCR, File), FTP, SharePoint ⁵ , Mobile Devices ⁶	
Advanced Scanning Features	Auto deskew, Multi-page to single-page, Base colour removal	
Duplex Scan	No	
Сору		
Copy Speed / Copy Resolution (max.)	Up to 36 cpm / Up to 600 x 600 dpi	
Copy Options	Sorting, N-in-1, Multi-copying (up to 99), Reduce / Enlarge 25 - 400% in 1% increments	
Duplex Copy	No	
Connectivity & Compatibility		
Standard Interfaces	Wireless 802.11b/g/n (2.4GHz) / 802.11a/n (5GHz), Ethernet, Hi-Speed USB 2.0	
Operating Systems Compatibility ⁷	For the latest OS compatibility and to download drivers, visit support.brother.com.	
Mobile Device Compatibility ⁶	AirPrint®, Mopria®, Brother Mobile Connect, Wi-Fi Direct®	
Alex Print	Yes	
Security		
Security Features	Enterprise Security (802.1x), TLS/SSL, IP Filter, SNMP v3	
Paper Handling		
Paper Input Capacity (max.)8	250-sheets paper tray, single-sheet manual feed slot	
Output Capacity (max.)8	100 sheets	
Document Glass Size	Up to 8.5" x 11" (Letter)	
Auto Document Feeder Capacity ⁸	50 pages	
Paper Size	Standard Tray: Letter, Legal, Executive, A4, A5, A6, B5, B6, Folio Manual Feed Slot: Width 3" to 8.5", Length 5" to 14" Duplex: Letter, Legal, Folio	
Media Types	Standard Tray: Plain Paper, Thin Paper, Thick Paper, Recycled Paper Manual Feed Slot: Plain Paper, Thin Paper, Thick Paper, Recycled Paper, Bond, Label, Envelope (single)	
Media Weights	Standard Tray: 16 to 43 lbs ⁹ Manual Feed Slot: 16 to 61 lbs ADF: 16 to 28 lbs	
General		
Automatic Duplex Capability	Print	
Display	2-line LCD	
Processor	600 MHz	
Memory (std.)	256 MB	
Included Software ⁶	Brother Mobile Connect for iOS® and Android™ Brother iPrint&Scan (desktop) for Windows and Mac® BRAdmin Light, BRAdmin Pro, Status Monitor⁵	
Refresh EZ Print Subscription Eligible	Yes	
Energy Star® Qualified	Yes	
EPEAT Certified	Yes (Silver Rated)	
Maximum Monthly Duty Cycle ¹⁰	Up to 35,000 pages	
Recommended Monthly Volume ¹¹	Up to 2,500 pages	
Warranty	1-year limited warranty	

Replacement Supplies & Optional Accessories:



TN830	Standard Yield Toner Cartridge (1,200 pages) ¹²	
TN830XL	High Yield Toner Cartridge (3,000 pages) ¹²	
TN830XL 2PK	High Yield Toner Cartridge 2-Pack (3,000 pages per cartridge)12	
DR830	Drum Unit (15,000 pages) ¹³	

Dimensions/Weights:

Unit Dimensions / Weight	16.1" (W) x 15.7" (D) x 12.5" (H)/25.0 lbs.
Carton Dimensions / Weight	22.8" (W) x 20.4" (D) x 17.1" (H)/ 30.7 lbs.

Carton Contents:

Brother DCP-L2640DW, Starter Black Toner Cartridge (700 pages)¹², DR830 Drum Unit (15,000 pages)¹³, AC Power Cord, Product Safety Guide, Reference Guide, Warranty Card, Quick Setup Guide



Working with you for a better environment

At Brother, our green initiative is simple. We strive to take responsibility, act respectfully and try to make a positive difference to help build a society where sustainable development can be achieved. We call this approach Brother Earth.

















- 1 Based on one sided printing. Change from default setting required.
 2 From ready mode and standard tray.
 3 PostScript@3" compatible.
 4 Colour and monochrome scan speed with all advanced features turned off, Letter at 300dpi.
 5 Windows only.
 6 May require free download. Compatibility may vary by device and operating system. Requires connection to a wireless network.
 7 For the latest OS compatibility and to download drivers, visit support.brother.com. Printing or scanning via macOS requires the use of AirPrint. Mac printer drivers are not provided. Server 2012/2016/2019 network printing only.
 8 Maximum capacity based on using 20 lb. paper.
 9 Print speed may vary depending on size/type of paper used and paper source.
 10 Maximum number of printed pages per month can be used to compare designed durability between like Brother products. For maximum printer life, it is best to choose a printer with a duty cycle that far exceeds your print requirements.
 - 11 The recommended range of monthly printed pages to achieve the best possible performance and printer life. Printers are intended to hade occasional usage beyond this range with little or ne effect. Consistently printing above the recommended print volume, however, may adversely affect the print quality or life of the machine. It is always best to choose a printer with an appropriate recommended print volume to allow for any anticipated increase in printing needs.
 - to allow for any anticipated increase in printing needs.

 12 Approximate toner cartridge yields in accordance with ISO/IEC 19752 (Letter/A4)

 13 Approximately 15,000 pages based on 1 page per job (letter/A4 single-sided pages). The number of pages may be affected due to a variety of factors including but not limited to media type and media size.